



TECHNICAL SPECIFICATION

CHAIN DRIVEN BELT

Dimensions in mm and in
Configuration options and drive interfaces

PROVEN · STABLE · VERIFIED



A manufacturer supporting your belt specification


Ningjin Yiyi Mesh Belt Co., Ltd.

YIYI MESH BELT manufactures metal conveyor belts and related conveyor components in Ningjin, Shandong, China.

Manufacturing experience since 1998.
Current company established in 2008.

OEM equipment builders, professional distributors and replacement-belt buyers can submit drawings and application details for engineering review.

Custom projects: drawing approval, trial production and final inspection before shipment.

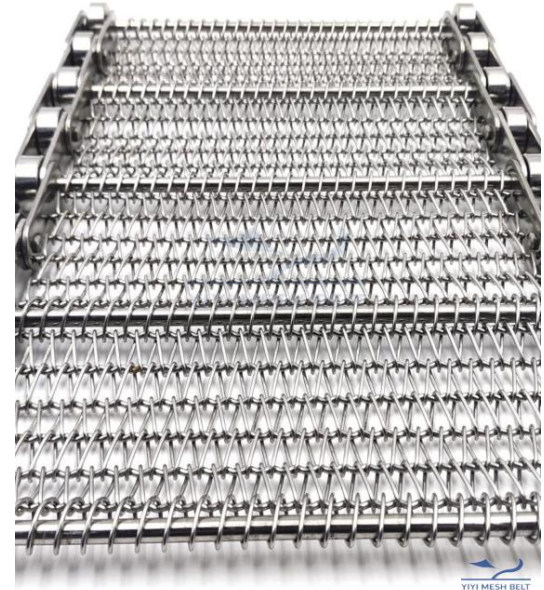

Typical applications

Typical uses in industrial conveying and processing lines. Configuration is confirmed on the approved equipment drawing.

01

HEAT TREATMENT

For conveying parts through heat-treatment equipment. Material and chain construction are selected for the operating conditions.

02

PARTS WASHING

For conveying parts through washing sections. Material, mesh pitch and edge construction follow the approved drawing.

03

INDUSTRIAL CONVEYING

For general industrial conveyor lines. Chain pitch, chain model and sprocket profile are confirmed together.


04

HEAVY-DUTY CONVEYING


For conveying heavier loads. Wire diameter, cross rod diameter and chain reference are selected for the load.

Suitability depends on the belt specification, material, operating conditions and equipment design.

Construction and surface details

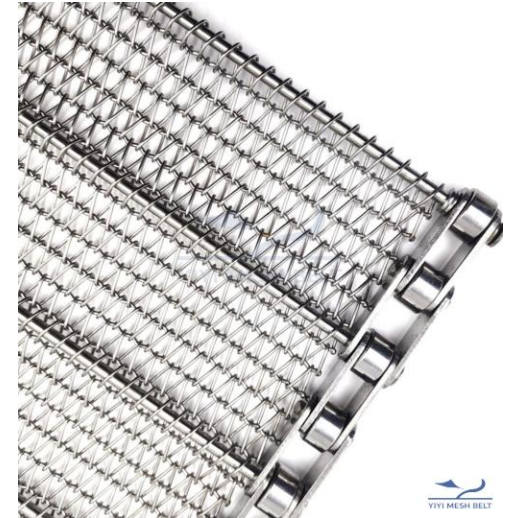

Additional product configurations

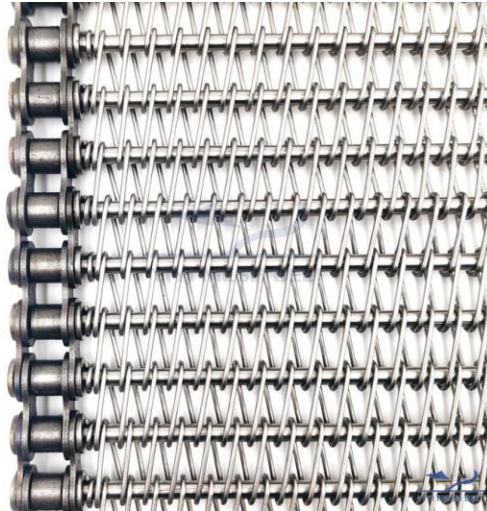

Dimensional options

Parameter	Metric (mm)	Inch (in)
Spiral pitch	3–20	0.118–0.787
Mesh rod pitch	4–20	0.157–0.787
Wire diameter	1 / 1.2 / 1.4 / 1.6 1.8 / 2 / 2.5 / 3	0.039 / 0.047 / 0.055 / 0.063 0.071 / 0.079 / 0.098 / 0.118
Cross rod diameter	4 / 5 / 6 8 / 9	0.157 / 0.197 / 0.236 0.315 / 0.354
Chain pitch	12.7 / 15.875 / 25.4 / 31.75 38.1 / 50.8 / 63.5	0.500 / 0.625 / 1.000 / 1.250 1.500 / 2.000 / 2.500
Belt width	300–5000	11.81–196.85
Belt length	To approved drawing	To approved drawing

Listed options require project selection. Custom dimensions follow the approved drawing.


1 in = 25.4 mm. Inch equivalents are rounded references, not manufacturing tolerances.

Materials and configuration options

Parameter	Selection
Material	SUS 304 / SUS 316 / carbon steel
Chain references	#40 / #50 / C2042 / C2052 / C2062 / C2082 / C2102
Chain construction	Solid or hollow pin construction, confirmed by drawing
Edge construction	Washer welded / cotter pin
Accessories	Side guide / tube / side roller / square bar / flights / side plate
Belt, chain and sprocket	Confirm the chain standard, selected pitch and sprocket profile together

Select materials, geometry and components together for the application and approved drawing.

Dimensional references and equipment interfaces

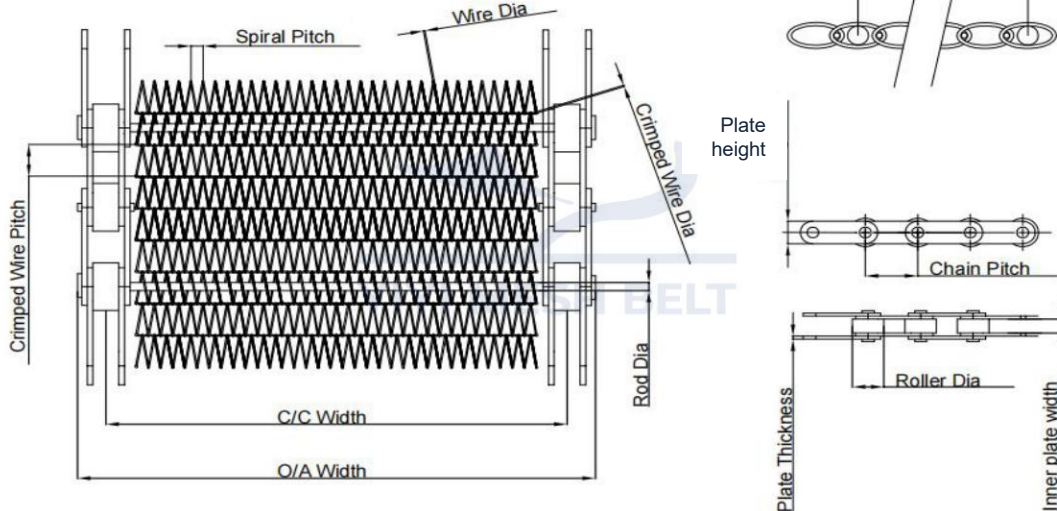

Drawing requirements

Specify mesh pitch separately from chain pitch. Confirm the cross rods and chain attachments.

Show chain center distance, overall width, roller diameter and inner plate width.


Match chain pitch, chain model and sprocket geometry as one assembly.

Dimensioned customer drawings define the final geometry, tolerances and component interfaces.


Material options for project conditions



SUS304

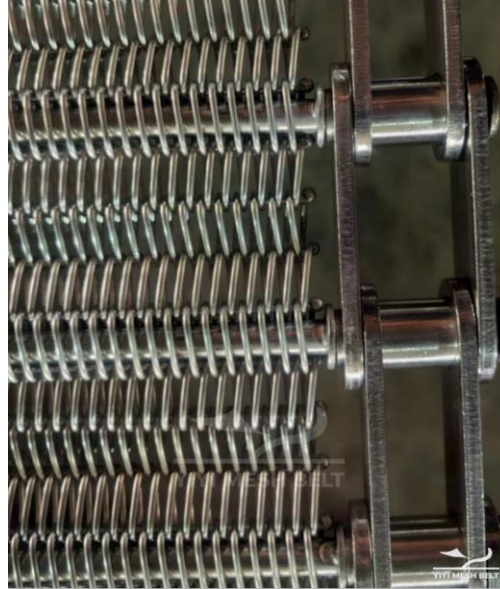

SUS316

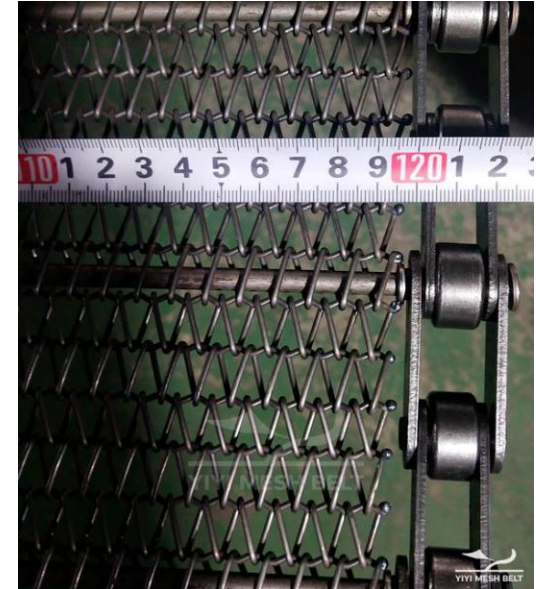

CARBON STEEL


Chain pitch options



12.7 mm / 0.500 in



25.4 mm / 1.000 in

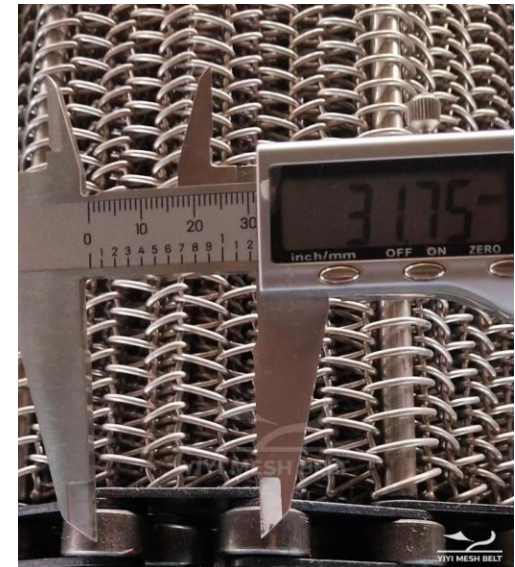

31.75 mm / 1.250 in

Chain pitch options



38.1 mm / 1.500 in



50.8 mm / 2.000 in



63.5 mm / 2.500 in

Edge treatment options



WASHER WELDED



COTTER PIN

Accessories and construction options



BLUE PLASTIC SIDE GUIDE



TUBE

Accessories and construction options



STAINLESS STEEL SIDE ROLLER



SQUARE BAR

Accessories and construction options



SPIRAL WIRE FLIGHTS



SIDE PLATE

Accessories and construction options



“L” TYPE FLIGHTS

Matching sprockets



SUS 304 / SUS 316 — CHAIN BELT SPROCKET

Confirm belt pitch, tooth count, bore, keyway and mounting dimensions (mm / in).
Match the sprocket profile and material to the approved equipment drawing.

Matching sprockets



MILD STEEL — CHAIN BELT SPROCKET

Confirm belt pitch, tooth count, bore, keyway and mounting dimensions (mm / in).
Match the sprocket profile and material to the approved equipment drawing.



PROVEN · STABLE · VERIFIED

Metal Conveyor Belt Manufacturer

for OEMs & Professional Distributors

Email: info@yiyimeshbelt.com

Phone / WhatsApp: +86 134 5177 3742

Website: www.yiyimeshbelt.com
www.yiyimeshbelts.com

Company: Ningjin Yiyi Mesh Belt Co., Ltd.

Send Your Drawing for Specification Review

- Belt dimensions (mm / in)
- Equipment and application
- Operating conditions
- Drive and shaft details
- Existing belt photos / sample

Request an Engineering Review

© 2026 Ningjin Yiyi Mesh Belt Co., Ltd. All rights reserved.

YIYI Mesh Belt's original technical content, photographs and videos in this document and on www.yiyimeshbelt.com and www.yiyimeshbelts.com may not be reproduced or reused without prior written permission. Third-party materials remain the property of their respective owners.